



...competitive technologies
with compelling value

CT-HDMI-4X4 MATRIX

4 x 4 HDMI Matrix Switch

Features:

- Four Individual HDMI inputs
- Four Individual HDMI outputs
- Switches any of the four inputs to any or all of the 4 outputs
- Switches via front panel control infrared remote or RS-232 control

Contents Include:

- 1 CT-HDMI-4X4 MATRIX
- 1 Infrared Remote
- 1 Rack mount kit
- 1 Remote battery
- 1 5V DC Power supply
- 1 User's manual



Description:

The CT-HDMI-4X4 MATRIX is a 4 input, 4 output HDMI matrix switch. This matrix switch has the ability to route any of the four HDMI inputs to any or all of the four HDMI outputs. The output routing can be controlled via easily accessible front panel controls, infrared remote control or RS-232. A convenient rack mount kit is included to provide for mounting in a 19" equipment rack.

The CT-HDMI-4X4 MATRIX is perfect for high end home theater applications, board rooms, conference centers, sports bars and any other application that requires multiple HDMI inputs to be routed to multiple HDMI outputs. The unit is housed in an attractive, low profile casing with convenient front panel controls and front panel indication LEDs.

Specifications:

HDTV Resolutions:	480p, 720p, 1080i, 1080p
Standard TV Resolution:	480i
Maximum Cable Distance	
Inputs:	50' Max.
Outputs:	50' Max.
Connections	
Inputs:	4 HDMI
Outputs:	4 HDMI
Serial Interface:	RS-232
Remote Control:	Infrared
Dimensions:	1.73"H x 16.97"W x 8"D (44 x 431 x 203mm)
Weight:	5 lbs. (2265g)
Operating Temperature:	32° to 104° F (0° to 40° C)
Operating Humidity:	10% to 85% (Non-condensing)
Storage Temperature:	20° to 140° F (-20° to 60° C)
Storage Humidity:	10% to 85% (Non-condensing)
External Power Supply:	5VDC@3A
Regulatory Approvals	
Matrix Switch:	FCC, CE, RoHS
Power Supply:	UL, CE, CSA, CEC, RoHS

Email: sales@cabletronix.com

Web: www.cabletronix.com

HDMI Switches 2 x 1 & 4 x 1



CT-HDMI 2X1
2 Input, 1 Output HDMI Switcher




CT-HDMI 4X1
4 Input, 1 Output HDMI Switcher

The CT-HDMI series of HDMI switchers are designed to allow access to multiple HDMI devices such as DVD players and satellite receivers to a single HDMI display. The viewer can switch multiple HDMI inputs to a single display via remote control avoiding the hassles of manually plugging in different HDMI connectors to view different HDMI sources. These units support all HDTV resolution formats including 480i, 480p, 720i, 720p, 1080i and 1080p. Installation requires only the contents of the package (Switcher, power supply, remote, battery and instruction manual) along with male to male HDMI cables of the necessary lengths (sold separately). The CT-HDMI series of HDMI switchers are the perfect addition to any high end home theater system.

Specifications:

HDMI Source Input Ports:	HDMI Female Single Link, TMDS, 2 or 4 Input
Display Device Output Port:	HDMI Single Link, TMDS, 1 Output
Interface:	1 DC Power Jack 2 or 4 HDMI Input Connectors 1 HDMI Output Connector
Single Link Range:	VGA, SVGA, XGA, UXGA 480i, 480p, 720i, 720p, 1080i, 1080p
HDCP Function:	HDCP Compliant
Display Device Selection:	Push Button On Unit Face or Push Button On Remote Control
Cable Lengths:	Inputs - Up to 6' Maximum Output - Up to 15' Maximum
Power Adapter:	9VDC, 500mA (Included)
Remote Battery:	3V Lithium (Included)
Enclosure:	Metal
Unit Dimensions:	6.75"W x 2 7/8"D x 1 1/8"H
Unit Weight:	CT-HDMI 2X1 - 11.3 oz. CT-HDMI 4X1 - 11.6 oz.
Remote Dimensions:	1 1/4"W x 3 1/4" L x 5/16"H

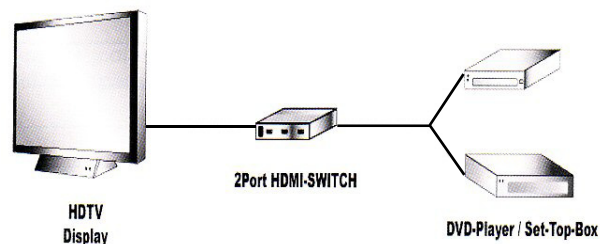

Related Items:

CT-HDMI-3	3' HDMI Cable
CT-HDMI-6	6' HDMI Cable
CT-HDMI-10	10' HDMI Cable
CT-HDMI-15	15' HDMI Cable
CT-HDMI-25	25' HDMI Cable
CT-HDMI-50	50' HDMI Cable
CT-HDMI-DVI-6	6' HDMI to DVI Cable
CT-DVI-DVI-6D	6' DVI Cable
CT-HF-DM-ADAP	HDMI Fem. to DVI Male Adapter
CT-HM-DF-ADAP	HDMI Male to DVI Fem. Adapter
CT-HDMI-F/F	HDMI Female to HDMI Female Adapter