



INSTALLATION MANUAL

CT-LCD-403A **Swivel/Tilt Extension Wall Mount** **for 10" to 30" LCD Television**



PACKAGE CONTENTS

This package contains:


- One CT-LCD-403A Wall Mount
- Installation accessories
- Installation Manual

PRODUCT DESCRIPTION

The CT-LCD-403A is a swivel/tilt wall mount with an extended and articulated arm designed to support 10" to 30" LCD televisions with a maximum weight of 44 lbs. The LCD-403A is made of steel and comes in three finishes: CT-LCD-402A-B (black), CT-LCD-402A-S (silver), and CT-LCD-403A-W (white). The unit swivels left and right up to 190 degrees, and can be tilted up or down up to 20 degrees. Maximum extension is about 3" or 75mm. VESA® standard 50mm/75mm/100mm/200mm/200mmx100mm LCD monitors and televisions are supported.

SPECIFICATIONS

The diagram below represents dimensions and articulating range of the CT-LCD-403A.

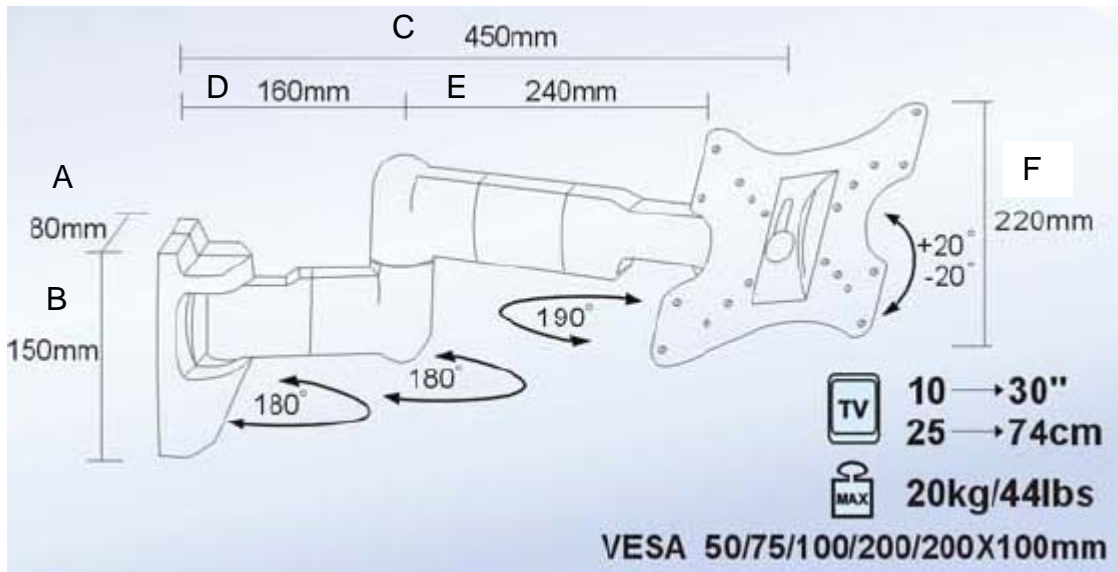

A: 3.2" (80mm)
B: 5.9" (150mm)
C: 17.7" (450mm)
D: 6.3" (260mm)
E: 9.5" (220mm)
F: 8.7" (220mm)

INSTALLATION

NOTE TO INSTALLER

Warning: The installer of this product must verify that the mounting surface will safely support the combined weight of all attached equipment and hardware. This product must be mounted on wall studs or concrete for a secure, stable, and reliable mounting. North American Cable Equipment, Inc. will not be held liable for the improper use or installation of this product.

1. UNPACKING and HANDLING

Each unit is shipped with all necessary mounting hardware.

Ensure that all accessories are removed from the container before discarding packing material

2. MECHANICAL INSPECTION

Inspect the product for shipping damage. Make sure the equipment is clean and damage free. If equipment appears to be damaged or defective please contact us at 1-610-429-1511 for assistance.

3. INSTALLATION

- a. Predetermine the best possible viewing location for the monitor.
- b. Attach the LCD wall mount to studs in the wall using with the appropriate hardware. The wall plate **MUST** be attached to the studs. Lag screws have been included for wood stud installation.
- c. Multiple VESA® patterns can be supported by aligning the LCD monitor/TV with the correct holes on the wall plate. Attach the LCD monitor/TV with the screws appropriate for you unit.
- d. Wrap loose cords using cable ties. However, be sure to provide sufficient slack for the full movement of the monitor/TV.
- e. For assistance contact Cabletronix sales engineers at 1-610-429-1511.