



...competitive technologies with compelling value

## CTARM-2SV Residential Digital Agile Modulators with S-Video Inputs

### Product Description

The CTARM-2SV residential digital frequency agile modulator allows for the insertion of multiple video and left and right audio signals from a variety of devices including satellite receivers, VCRs, DVD players, and security cameras on user selected TV channels. This modulator creates a separate TV channel for each video device, combines the new channels with cable or broadcast TV channels, and routes the output to all TVs in the home via existing cable outlets.

The CTARM-2SV features S-Video inputs to allow for a better quality video input from the audio video source.

The CTARM-2SV is housed in a low profile case with channel output selection buttons and LED channel display. Non-volatile memory is included to remember channel assignments in event of power failure.

### Application

The CTARM-2SV modulator allows consumers to watch what they want from any home TV without having to pay for extra VCRs, DVD players, cable boxes, satellite receivers, or surveillance monitors. The modulators also allow a consumer to introduce a new "video service" such as home security cameras to their existing cable system without additional wiring. In this example, a consumer could now monitor the security camera from a designated channel on any TV in the house at any time.



### Features & Benefits

- Extended channel range UHF 14 to 78 and CATV 65 to 135 (excluding 95 – 99)
- Dual RCA audio inputs directly on the unit
- Audio and Video AGC
- Recessed front panel control to avoid accidental channel changing
- Precise digital PLL control
- Multiple video content distribution to all TVs in the home without the purchase of additional video devices
- Compatibility with all standard consumer video and security devices and NTSC TVs ensures investment protection
- Combined left/right inputs
- 1 year warranty
- 3 year extended warranty available


# CTARM-2SV

## Residential Digital Agile Modulator with S-Video Inputs

### Specifications

Output Frequency	468-862 MHz
Output Standard	NTSC
Output Channel Range	UHF 14-78 CATV 65-135 (excluding 95 to 99)
Number of Modulators	2
Output Power	25 dBmV Typical
Output Power Adjustable Range	0-10dB Typical
Output Connector	"F"
CATV/Off-Air Input Connector	"F"
Audio Input	2X RCA for each modulator
Video Input	1X S-Video for each modulator
Frequency Stability	+/- 25 KHz Typical
Video Input	1V Peak-to-Peak
Audio Input	300mV Peak-to-Peak
Video Modulation Index	87.5% Typical, 82.5% Minimum
Weight	1lb. 12oz.
Size	7 3/4" W x 1 3/4" H x 5 1/2" D
Power Requirement	115V, 60 Hz AC power adapter included

### Sample Configuration

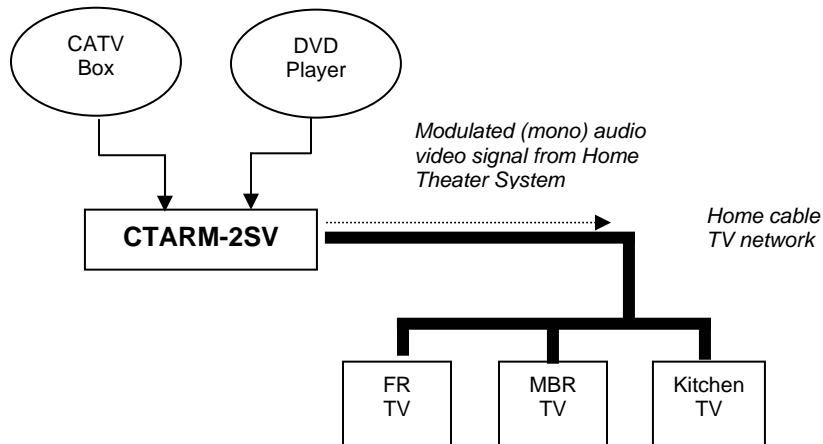

*CTARM-2SV modulators are regulatory compliant and are FCC approved. All product specifications are accurate at time of printing, but are subject to change.*

*Products are warranted for one year. Warranty can be extended to three years. Contact a sales engineer for details.*

**Extended Warranty**  
Extends standard 1 year  
warranty to 3 years  
**CTARM-2SV WARRANTY**