




...competitive technologies with compelling value

CT-4XCOMP

1 x 4 Component Video / Audio Distribution Amplifier

Product Description

The CT-4XCOMP is designed to distribute a single audio/video source to up to four destinations. A component video source with left and right baseband audio can be split to four separate locations with no loss of signal quality. A convenient composite video connection is also included. The unit has been designed with all RCA connections for ease of use. Units can be daisy chained to supply more than four outputs. Compact design and affordable pricing make the CT-4XCOMP a perfect item to keep on hand in every installation vehicle.

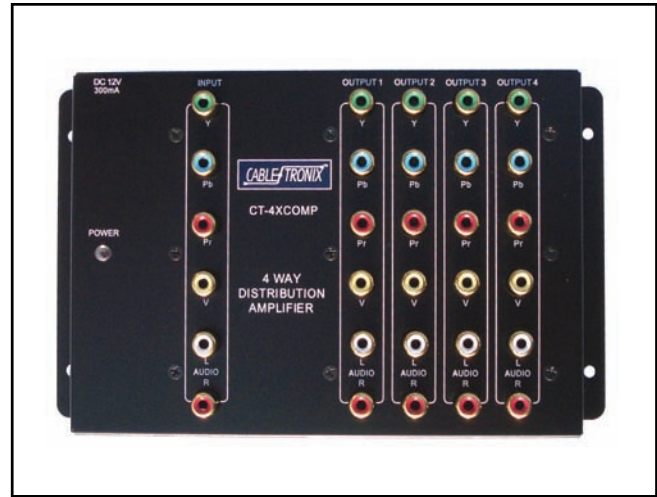

Applications

The CT-4XCOMP is perfect for splitting the component output of a DVD player, VCR, satellite receiver or DVR to up to four destinations including display monitors, DVRs, televisions and VCRs.

Specifications:

- One set of RCA component video composite video and audio inputs
- Four sets of RCA component video composite video and audio outputs
- Ideal for high definition signal sources
- Maintains original A/V signal strength for distribution
- Supports 480i, 480p, 720p, 1080i & 1080p resolutions

Specifications

Impedance:	
Video	75 ohm
Audio Input	47K ohm
Audio Output	1K ohm
Bandwidth:	
Component Video	60 MHz
Composite Video	6 MHz
Audio L/R	20 KHz
Input Level:	
Component Video	1Vp-p
Composite Video	1Vp-p
Audio L/R	1Vp-p
Output Level:	
Component Video	0.9Vp-p min.
Composite Video	0.9Vp-p min.
Audio L/R	0.95Vp-p min.
Isolation:	
20 dB	Same Port
35 dB	Different Port
L/R Separation:	40 dB
Power Supply:	12VAC 300mA
Dimensions (W x H x D):	7.72" x 1.3" x 4.88"

