




...competitive technologies
with compelling value

Category 5e UTP Network Cable CCA Conductors CAT5E-CCA-BX-*

Features:

- Four Pair, 24 AWG
- Copper Clad Aluminum Conductors
- Tested to 100 MHz
- Available in Blue, Gray Or Yellow PVC Jackets
- Convenient, 1,000' Easy Pull Box
- Footage Marked
- CM Rated
- UL Listed

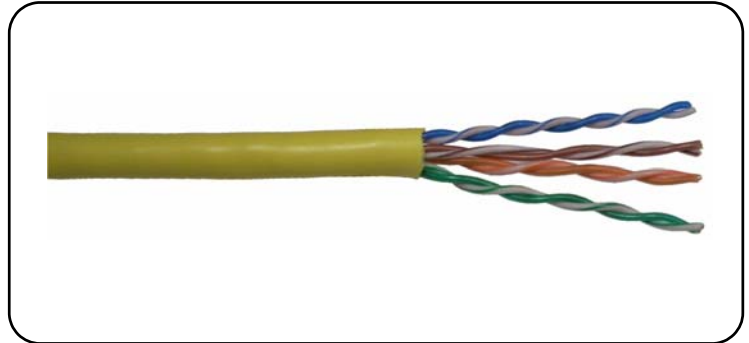

Conductors

Number Of Conductors:	4 Pair
Material:	Copper clad aluminum
Tensile Strength:	180 MPA
Construction:	24 AWG: 0.50 +/- 0.008mm

Pair Coloring

Pair 1:	Blue - White/Blue
Pair 2:	Orange - White/Orange
Pair 3:	Green - White/Green
Pair 4:	Brown - White/Brown

Insulation

Material:	HDPE
Nominal Thickness:	0.20 +/- 0.05mm
Nominal Diameter:	0.90 +/- 0.05mm

Ratings:


MP/CM (UL) C(UL)

Jacket

Material:	PVC
Nominal Thickness:	0.5 +/- 0.2mm
Nominal Diameter:	4.8 +/- 0.2mm

Compliant Network Standards

10BASE-T	ATM-155
100BASE-TX	100VG-AnyLan
100BASE-T4	TR-4
1000BASE-T	TR-16 Active
ATM-25	TR-16 Passive
ATM-51	

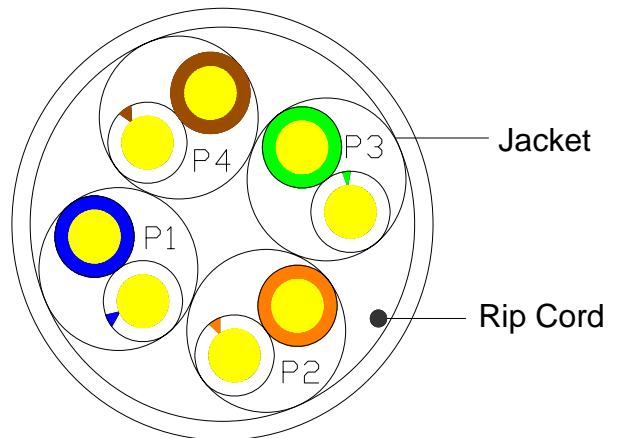

Ordering Information:

CAT5E-CCA-BX-BL	Cat5e, CCA Conductors, 1,000' Pull Box, Blue Jacket
CAT5E-CCA-BX-YL	Cat5e, CCA Conductors, 1,000' Pull Box, Yellow Jacket
CAT5E-CCA-BX-GY	Cat5e, CCA Conductors, 1,000' Pull Box, Gray Jacket

Email: sales@cabletronix.com

Web: www.cabletronix.com